



外形安装尺寸  
Mounting Dimension Sheets-overview

R67

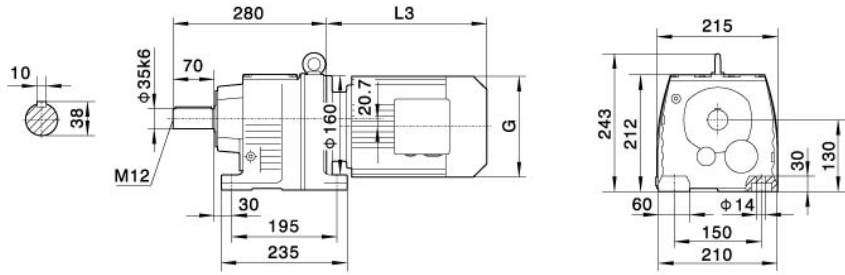


电机需方配时或配特殊电机时需加联接法兰  
When equipping the user's motor or the special one, the flange is required to connected.




RF67


Φ 200

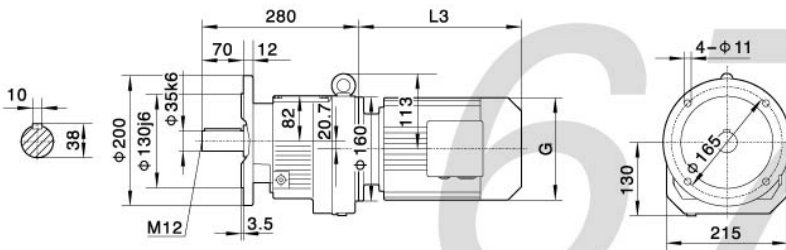


R..S67



Φ 250

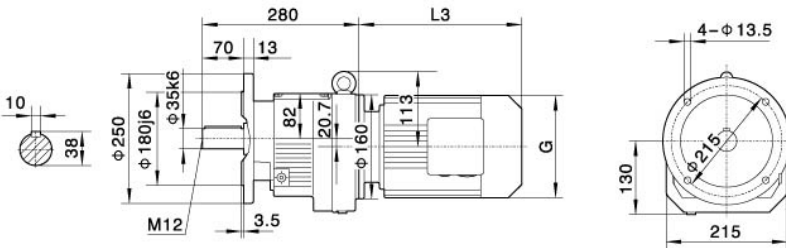

R..67R37

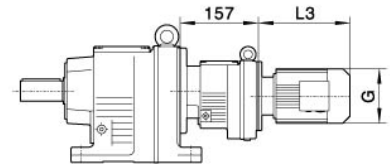

注：其余尺寸见相应的结构形式  
Note: For other values please refer to the oppsited structure

| Y2电机机座号<br>Motor size | 63   | 71        | 80        | 90S | 90L | 100L    | 112M | 132S | 132M |  |
|-----------------------|------|-----------|-----------|-----|-----|---------|------|------|------|--|
| 功率/4P<br>Power/(kW)   | 0.18 | 0.25 0.37 | 0.55 0.75 | 1.1 | 1.5 | 2.2 3.0 | 4.0  | 5.5  | 7.5  |  |
| L3                    | 223  | 245       | 278       | 304 | 328 | 350     | 380  | 425  | 461  |  |
| G                     | 130  | 145       | 175       | 195 | 195 | 215     | 240  | 275  | 275  |  |
| L2                    | 81   | 81        | 81        | 81  | 81  | 93      | 93   | 101  | 101  |  |

注：“R..”表示R、RF

Note：“R..”mean R、RF